



Outline Dimension

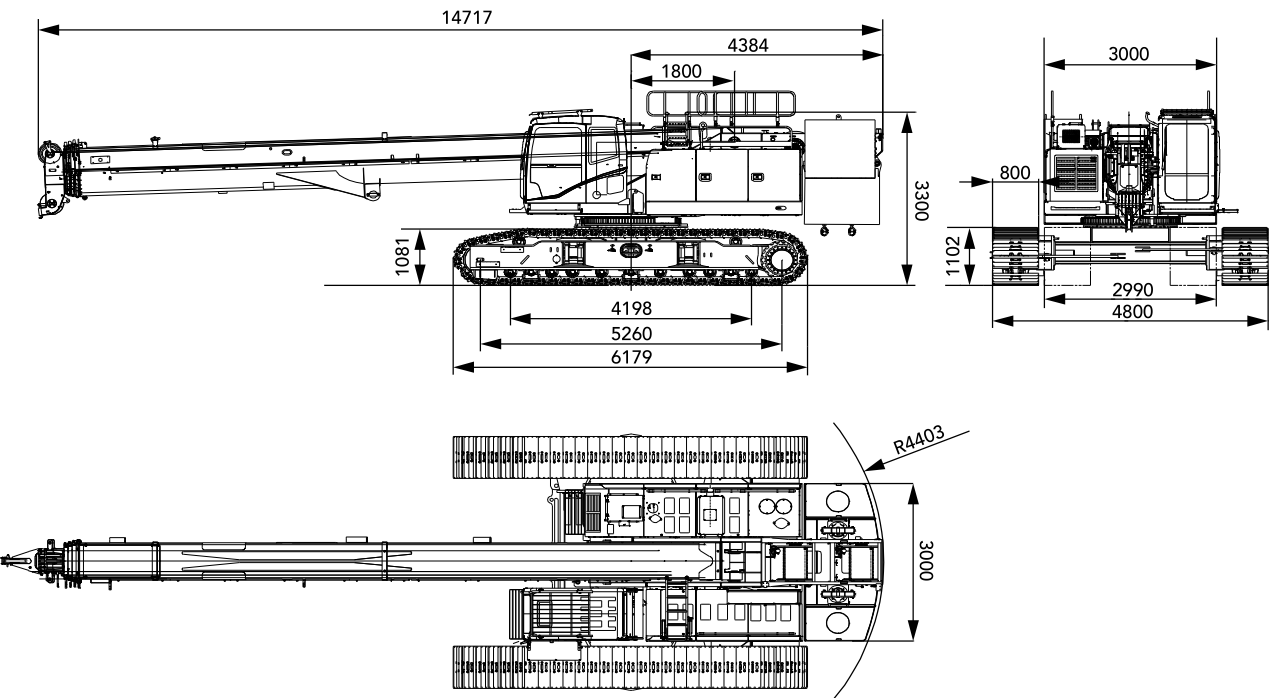

Working Radius of H Configuration

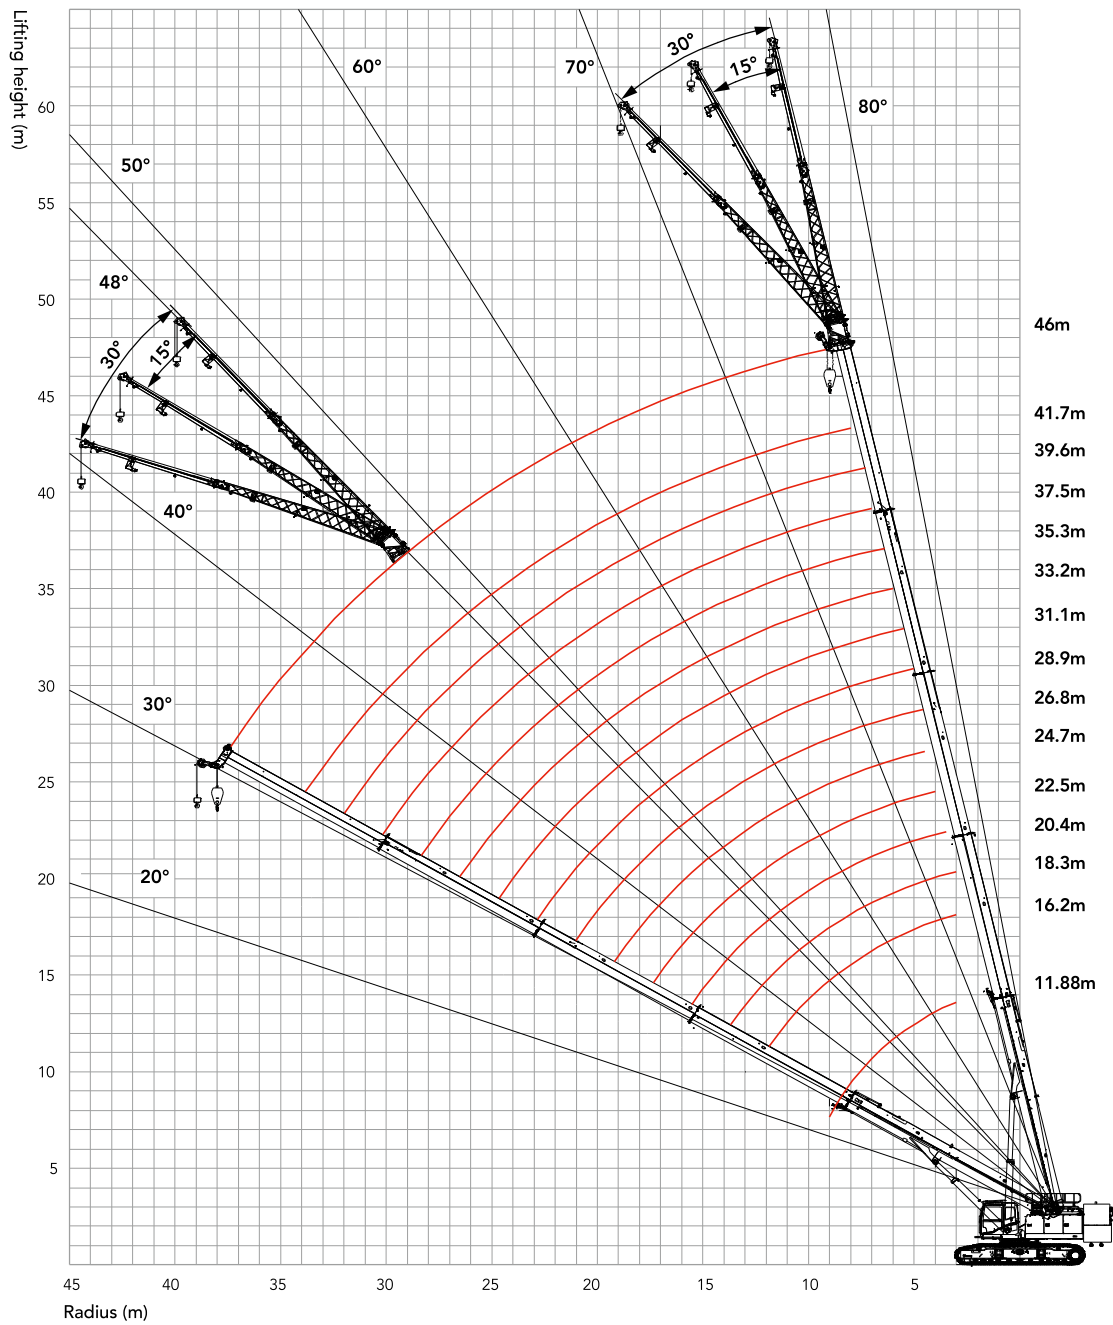

Unit: t

Load chart of H

H Configuration								
Counterweight:19t, Crawler fully extended								
Radius (m)	11.88	16.2	20.4	26.8	33.2	39.6	46.0	Radius (m)
3	60	46						3
3.5	51.5	46	36					3.5
4	48	46	36					4
4.5	45	44	36	28				4.5
5	44	41.5	34	28				5
5.5	38	37.5	32	28				5.5
6	34	33.5	30.5	27	20			6
6.5	31.5	30	27.4	26	20			6.5
7	29	27.1	24.8	23.9	20			7
7.5	26	24.7	22.6	21.9	19.5	14.5		7.5
8	23.4	22.5	20.7	20.2	18.5	14.5		8
9	19.2	18.5	17.5	17.3	16.8	13.7	10	9
10		15.4	15	15	14.7	13	10	10
11		13	12.7	13.1	13	12.2	9.8	11
12		11.1	10.8	11.5	11.5	11.3	9.5	12
14			7.9	8.9	9.2	9.1	8.5	14
16			5.9	6.9	7.4	7.5	7.4	16
18				5.4	5.9	6.2	6.2	18
20				4.2	4.7	5.1	5.2	20
22				3.2	3.8	4.2	4.3	22
24					3	3.4	3.6	24
26					2.3	2.7	3	26
28					1.8	2.2	2.4	28
30						1.7	1.9	30
32						1.3	1.5	32
34							1.2	34
36							0.9	36
Parts of line(n)	12	10	8	6	5	4	3	Parts of line(n)
Telescoping Cylinder 1	0	50	100	100	100	100	100	Telescoping Cylinder 1
Telescoping Cylinder 2	0	0	0	25	50	75	100	Telescoping Cylinder 2
Min. Angle	0	0	0	0	0	31	30	Min. Angle